

Polex™ MDC P Reverse Pulse Dust Collectors

MDC 24000 P™ 30 kW (tall version)


MDC-P series is an intelligent dust collector that automatically and continuously self cleans its filter cartridges with a reverse pulse action. The MDC-P is available with airflow from 6,000 to 210,000 m³/h.

It has been designed in Australia by experienced engineers to suit Australian industry requirements for a dust collector that requires the minimum amount of labour and energy to operate.

The MDC-P is supplied standard with a Rotary Discharge Valve (or airlock).

The MDC-P is supplied standard with a High Efficiency Clean Air Fan that produces around 25% more air than conventional Fans and saves on energy costs.

The Variable Speed Drive (optional) is a fantastic energy saving device that lowers and increases the power consumption of the fan motor when slide dampers are closed and opened.

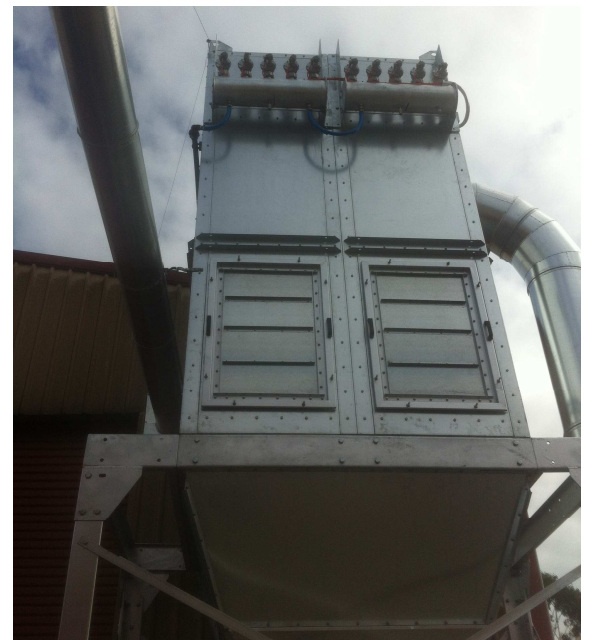

Specifications

Model	MDC 24000 P™ 30 kW (tall)
Fan Motor	30 kW, 2 pole, 3 phase, 415 V, IP55
Air Flow	Up to 24000 m ³ /h
Filter Area	100 m ²
Rotary Valve	0.75 kW, 4 pole, 3 phase, 415 V, IP55
Pulse Valves	10 @ 240 VAC
Height	7370 mm
Width	2563 mm
Depth	2050 mm
Bin Size	Up to 3 m ³
Control panel	30 kW star-delta (or optional 30 kW VSD)

Important note: Fires and dust explosions can be caused by various ignition sources including sparks and optimum dust concentrations etc. We recommend fitting dust collectors with explosion vents and locating them outside of buildings to reduce the risk of damage to property and personnel in the event of an explosion or fire.

Polex Environmental Engineering Pty Ltd ACN 121 129 842

www.polex.com.au

343-345 Chisholm Road Auburn NSW 2144 Australia. Tel +61 2 9738 1777 Fax +61 2 9738 1999 info@polex.com.au

Polex reserves the right to change design without notice. Copyright 2014 Polex Environmental Engineering Pty Ltd